

BRANSON

ULTRASONIC ASSEMBLY SYSTEMS

2000X t/ae

- Weld by time, ground detect
- Available in 3 frequencies - 20, 30, and 40 kHz
- Digital amplitude setting
- Multiple language choices
- Increased power levels



2000X

TOTALLY DIGITAL

DIGITAL CONTROLS

DIGITAL POWER SUPPLY

ETHERNET OPTION

ADDITIONAL SOFTWARE FEATURES

WELDING | STAKING | INSERTION | SWAGING | FORMING | SPOT WELDING | DEGATING | CUTTING AND SEALING

BRANSON

2000X t/ae


PROCESS CONTROL

- **Built-in digital amplitude control** - for fine tuning of critical applications.
- **True alarm messages for ease of troubleshooting**, with links to additional information.
- **Self-diagnostics and monitoring** - visual, audible, and logic output alarms.
- **Built-in alarm and cycle counters** to track production.
- **Printing capability** - Provides a record for future comparison and validation. Includes drivers for ESC/P and HPL drivers. Prints single line weld data and print setup.
- **Two nameable presets** for ease of setup and changeover of applications.
- **Selectable pretriggering** - auto and time
- **Password protection feature** for lock-out of unauthorized process changes once the equipment is set up for a specific application.
- **Total cycle time can be displayed** in weld results screen.
- **Available in 3 frequencies** - 20, 30, 40 kHz.



TOTALLY DIGITAL POWER SUPPLY

- **True Digital Autotune with Memory (AT/M)** - Provides fully-automatic tuning and stores horn frequency at the end of each weld.
- **Total Amplitude Control** - Utilizing Branson's digital power supply technology, you have complete control of amplitude throughout the weld cycle: programmable starting ramp, digital setting of weld amplitude, and energy braking.
- **Programmable Starting Ramp** - adjustable starting ramps from 10 milliseconds to 1.0 second to accommodate starting characteristics of a wide range of horns. This feature makes it easier to start more difficult horns. When utilizing smaller horns, you can minimize the starting ramp reducing cycle times.
- **Energy Braking** - a controlled stoppage of the ultrasonic stack. This feature eliminates the traditional "ring down" of the stack creating a more consistent energy input into parts. Small horns can actually be stopped faster, increasing throughput in high-speed automation.
- **Auto Seek automatically measures stack frequency and stores it in memory.** Five selectable Auto Seek choices are available.
- **Line / Load Regulation** - Corrects for variations due to power line fluctuations and varying load conditions through Branson's patented closed-loop amplitude control. Output amplitude is maintained with a variation of only $\pm 2\%$ with line voltage variations of $\pm 10\%$, regardless of load improving weld consistency. **(Fig.1)**
- **System Protection Monitor (SPM)** - Five levels of power supply protection are provided: 1. phasing, 2. over voltage, 3. over current, 4. over temperature, 5. power
- **Automation interface is for direct hook up with PLCs and PCs.** Required automation I/Os are provided through a 24V DC logic interface.

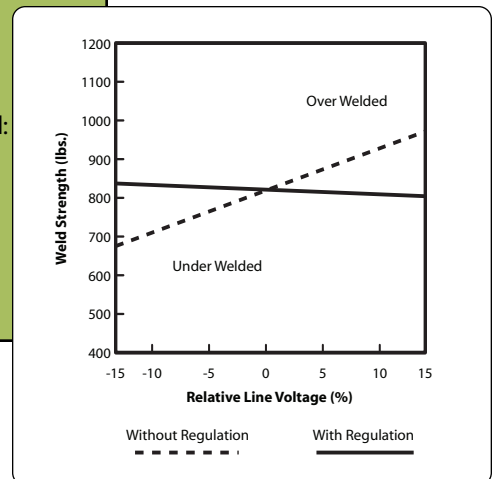

(Fig. 1)



ACTUATOR

- **Settable pressure and downspeed**
- **Custom single-turn flow control** provides for more accurate setting of downspeed.
- **Variable Dynamic Triggering** provides consistent weld quality by triggering ultrasonic vibrations after a preset force is applied to the part.
- **Dynamic Follow-through** ensures the smooth, efficient transmission of ultrasonic energy into the part by maintaining horn/part contact and force.
- **Enhanced ergonomics** - easily accessible controls on actuator with improved visibility.

2000X t/ae

BRANSON

2000X t/ae



AVAILABLE OPTIONS

- Ethernet card
- Base-mounted leveling plate for horn/fixture/part alignment
- Solid mount boosters
- Longer columns - 4' to 6' lengths
- Ground detect cable

2000X t/ae SPECIFICATIONS

2000X t Power Supply	20:1.25	20:2.5	20:4.0	30:0.75	30:1.5	40:0.4	40:0.8
Output power:	1250 Watts	2500 Watts	4000 Watts	750 Watts	1500 Watts	400 Watts	800 Watts
Line voltage:	117 V AC * 50/60 Hz, 1Ø	200-240 V AC 50/60 Hz, 1Ø	200-240 V AC 50/60 Hz, 1Ø	117 V AC * 50/60 Hz, 1Ø	117 V AC * 50/60 Hz, 1Ø	117 V AC * 50/60 Hz, 1Ø	117 V AC * 50/60 Hz, 1Ø
Max. current:	14 amps max.	14 amps max.	19 amps max.	10 amps max.	10 amps max.	5 amps max.	10 amps max.
Receptacle required:	NEMA 5-15R	NEMA L6-20R	NEMA L6-20R	NEMA 5-20R	NEMA 5-20R	NEMA 5-15R	NEMA 5-15R
Frequency:	20 kHz	20 kHz	20 kHz	30 kHz	30 kHz	40 kHz	40 kHz
Max. cycle rate:	80 cpm (application dependent)						
Ambient temp. range:	41-122° F (5-50° C)						
External inputs/outputs:	9-pin start connector; 44-pin user I/O connector						

* 200-240 V AC optional.

Actuator Model	ae 1.5	aef 2.0	ae 2.5	ae 3.0	ae 3.25
Max. clamp force on part (at 100 psig/690 kPa)	130 lbs. 578 N	270 lbs. 1.2 kN	440 lbs. 1.96 kN	640 lbs. 2.84 kN	770 lbs. 3.42 kN
Dynamic triggering range:	5 - 159 lbf. 22 - 707 N	15 -180 lbf. 67 - 800 N	15 -180 lbf. 67 - 800 N	15 -180 lbf. 67 - 800 N	15 -180 lbf. 67 - 800 N
Dynamic follow-through range:	15 -180 lbf. 67 - 800 N	15 -180 lbf. 67 - 800 N	15 -180 lbf. 67 - 800 N	15 -180 lbf. 67 - 800 N	15 -180 lbf. 67 - 800 N
Stroke length:	4" (101.6 mm)				
Pneumatic requirement:	Clean (5 micron, filtered), dry, non-lubricated air between 35 and 100 psi (130 - 690 kPa)				

All specifications subject to change without notice. All dimensions are nominal.

All units are CE compliant and comply with FCC rules and regulations governing radio frequency interference.

Note: All sales shall be subject to the Supplier's terms and conditions of sale as described in Branson's quotations and sales contracts.

WARRANTY

The Branson 2000X Series ultrasonic assembly systems carry a three-year warranty on materials or workmanship. Note: This warranty applies to equipment purchased and operated in North America. For warranty information on units purchased and/or operated outside the U.S. contact your local representative.



Branson

41 Eagle Road, Danbury, CT 06813-1961
203-796-0349 FAX 203-796-9838

E-mail: info@BransonUltrasonics.com
www.Branson-PlasticsJoin.com
www.Branson2000X.com